



ORIWRED

EMERGENCY DOWNLIGHT

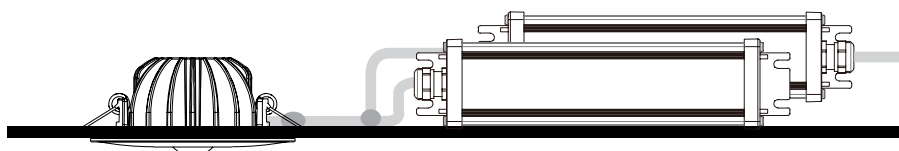

ORIWRED EMERGENCY RECESSED

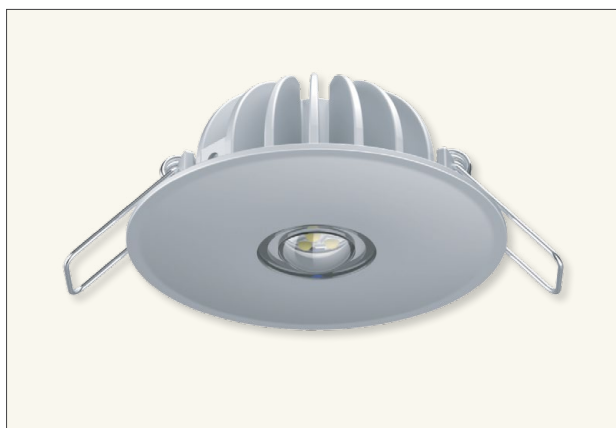

The OriWred recessed emergency luminaire combines a clean, low-profile design with reliable emergency performance. With IP65-rated construction, integrated auto-test functionality and a 3-hour emergency runtime, it delivers compliant illumination and dependable operation across commercial, public and exposed environments.

PRODUCT INFO

Range	Emergency Light
Model	OriWred
Operating Mode	Auto Test
Mounting Method	Recessed Mount
Battery	LiFePO4
Voltage	200-240VAC, 50/60Hz
Power Consumption Standby	4W

PERFORMANCE SPECIFICATIONS

IP Rating	IP65
IK Rating	IK06
Lumen Output	550 lm
CCT / CRI	5000K / Ra>70
Photometric Classification	C0 D63 C90 D63
Working Temperature	0°C to 45°C


DESIGN SPECIFICATIONS

Weight	0.5 KG
Construction	Aluminum & PC
Housing Colour	Silver Housing


COMPLIANCE & WARRANTY

Certificates Approvals	AS2293- AS/NZS
Warranty	5 Year Warranty

DIMENSIONS (MM)

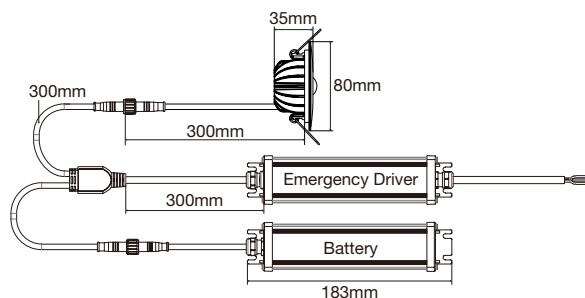

OriWred also includes a manual test switch located on the emergency driver

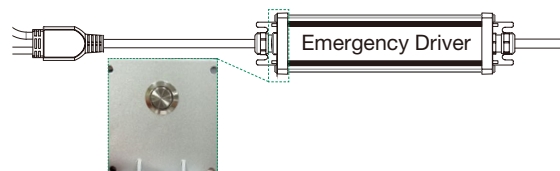

REPLACEMENT PARTS

Replacement Part Numbers	EMA-OWR-AT-WIDE-SI	Lamp Head
	EMA-OWR-AT-WIDE-SI	DRIVER
	EMA-OWR-AT-WIDE-SI	Battery

ORDERING EXAMPLE

EMA	OWR	AT	WIDE	SI
EMERGENCY	MODEL	TEST MODE	OPTICS	HOUSING COLOUR
EMA Emergency Light	OWR OriWred	AT Auto Test	WIDE Wide 140° Optics	SI Silver Housing